


Vented, Atmospherically Reference Counterbalance

透氣型 大氣參考 抗衡閥



Model Code 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension 尺寸 (mm)			Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c			
CA2*	T11A	60	35.1	22.2	73.4	45/50	0.20	350
CA3*	T2A	120	35.1	28.6	83.6	60/70	0.38	350
CA6*	T17A	240	46.0	31.8	95.0	200/215	0.74	350
CA8*	T19A	480	63.5	41.3	116.3	465/500	1.62	350

Turn screw clockwise to reduce setting and release load


順時針方向旋轉：降壓

逆時針方向旋轉：增壓

Full Adjustment

4 turns

全調四圈

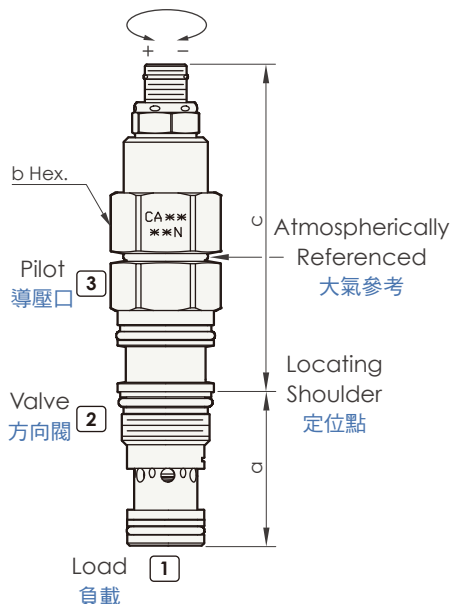

Option Ordering Information

選購型號

CA 2 A - T11A - L I N

① Model Code 產品型號

② Capacity (l/min) 流量

2: 60 3: 120 6: 240 8: 480

③ Pilot Ratio 導壓比

A: 3:1 G: 5:1

④ Cavity 閥孔型號

T11A T2A T17A T19A

⑤ Control 控制方式

L: standard screw adjustment 標準螺絲調整

⑥ Functional Setting Range 設定範圍

Pilot Ratio 導壓比		A: 3:1		G: 5:1	
Code 編號		H	I	G	F
Adjustment range (bar) 調壓範圍		70~280	28~105	140~420	70~175
Standard setting (bar) 出廠設定壓力		210	70	280	140

⑦ Seal 油封材質

N: buna-N V: viton

Performance Curves

性能曲線

Free Flow & Piloted Open

Pressure Drop

自由流及導壓開壓降曲線

