


Restrictive Counterbalance 4.5:1

全限流 抗衡閥 4.5:1



Model Code 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension 尺寸 (mm)			Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c			
CB2F	T11A	15	34.9	22.2	50	40/50	0.17	350
CB3F	T2A	30	34.9	28.6	61	60/70	0.30	350
CB6F	T17A	60	46.0	31.8	70	200/215	0.64	350
CB8F	T19A	80	63.5	41.3	90	465/500	1.47	350


Turn screw clockwise to reduce setting and release load
順時針方向旋轉：降壓

逆時針方向旋轉：增壓

Full Adjustment

3 turns

全調三圈

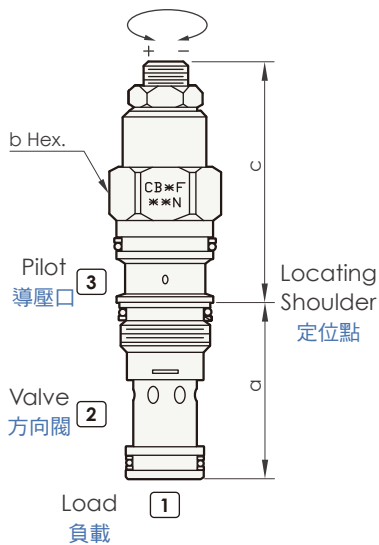

Option Ordering Information

選購型號

CB 2 F - T11A - L K N

① Model Code 產品型號

② Capacity (l/min) 流量

2: 15 3: 30 6: 60 8: 80

③ Pilot Ratio 導壓比

F: 4.5:1

④ Cavity 閥孔型號

T11A T2A T17A T19A

⑤ Control 控制方式

L: standard screw adjustment 標準螺絲調整

⑥ Functional Setting Range 設定範圍

Code 編號	J	K	C	D
Adjustment range (bar) 調壓範圍	140~350	70~175	140~350	70~175
Check (bar) 止回彈簧壓力	1.7	1.7	0.3	0.3
Standard setting (bar) 出廠設定壓力	210	140	210	140

⑦ Seal 油封材質

N: buna-N V: viton

Performance Curves

性能曲線

Free Flow & Piloted Open

Pressure Drop

自由流及導壓開壓降曲線

