


# Vented, Pilot-to-Open Check with External Pilot Port

透氣型 導壓口外接 導壓開單向閥




| Model Code<br>產品型號 | Cavity<br>閥孔型號 | Capacity<br>流量<br>(l/min) | Dimension 尺寸<br>(mm) |      |    | Torque<br>安裝扭力<br>(Nm) | Weight<br>重量<br>(kg) | Max. Pressure<br>最大壓力<br>(bar) |
|--------------------|----------------|---------------------------|----------------------|------|----|------------------------|----------------------|--------------------------------|
|                    |                |                           | a                    | b    | c  |                        |                      |                                |
| CK2F               | T11A           | 60                        | 34.9                 | 22.2 | 31 | 40/50                  | 0.13                 | 350                            |
| CK3F               | T2A            | 120                       | 34.9                 | 28.6 | 35 | 60/70                  | 0.24                 | 350                            |
| CK6F               | T17A           | 240                       | 46.0                 | 31.8 | 46 | 200/215                | 0.53                 | 350                            |
| CK8F               | T19A           | 480                       | 63.5                 | 41.3 | 59 | 465/500                | 1.16                 | 350                            |

## Option Ordering Information

選購型號

**CK 2 F - T11A - V C N**

- Model Code 產品型號**
- Capacity (l/min) 流量**  
2: 60    3: 120    6: 240    8: 480
- Pilot Version 導壓型式**  
F: external pilot 導壓口外接
- Cavity 閥孔型號**  
T11A    T2A    T17A    T19A
- Control 控制方式**  
V: external pilot port 外部接導壓管
- Cracking Pressure (bar) 開閥壓力**  
A: 0.3    C: 2.0    E: 5.0
- Seal 油封材質**  
N: buna-N    V: viton

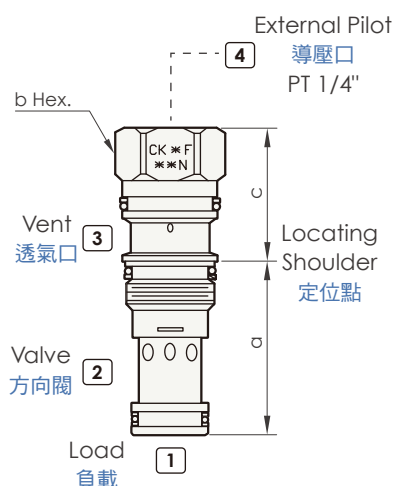

Pilot Ratio 導壓比  
3:1

## Performance Curves

性能曲線

Typical Pressure Drop  
壓降曲線

