


Vented, Counterbalance

透氣型 四口 抗衡閥



Model Code 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension 尺寸 (mm)			Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c			
CW2*	T21A	60	34.9	22.2	74.0	45/50	0.19	350
CW3*	T22A	120	34.9	28.6	84.0	60/70	0.36	350
CW6*	T23A	240	46.0	31.8	95.3	200/215	0.72	350
CW8*	T24A	480	63.5	41.3	117.0	465/500	1.60	350

Turn screw clockwise to reduce setting and release load


順時針方向旋轉：降壓

逆時針方向旋轉：增壓

Full Adjustment

4 turns

全調四圈

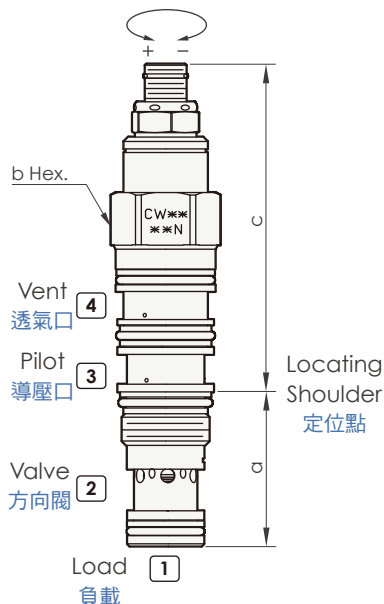

Option Ordering Information

選購型號

CW 2 A - T21A - L H N

① Model Code 產品型號

② Capacity (l/min) 流量

2: 60 3: 120 6: 240 8: 480

③ Pilot Ratio 導壓比

A: 3:1 G: 5:1

④ Cavity 閥孔型號

T21A T22A T23A T24A

⑤ Control 控制方式

L: standard screw adjustment 標準螺絲調整

⑥ Functional Setting Range 設定範圍

Pilot Ratio 導壓比		A: 3:1		G: 5:1	
Code 編號		H	I	G	F
Adjustment range (bar) 調壓範圍		70~280	28~105	140~420	70~175
Standard setting (bar) 出廠設定壓力		210	70	280	140

⑦ Seal 油封材質

N: buna-N V: viton

Performance Curves

性能曲線

Free Flow & Piloted Open Pressure Drop

自由流及導壓開壓降曲線

