


Direct Acting Pressure Reducing / Relieving

直動式減洩壓閥



Model Code 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension 尺寸 (mm)				Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c				
					L	K			
PR2B	T11A	40	34.9	22.2	79	85	40/50	0.20	350
PR3B	T2A	80	34.9	28.6	89	96	60/70	0.36	350
PR6B	T17A	160	46.0	31.8	100	107	200/215	0.76	350
PR8B	T19A	320	63.5	41.3	124	130	465/500	1.58	350

Option Ordering Information

選購型號

PR 2 B - T11A - L A N

① Model Code 產品型號

② Capacity (l/min) 流量

2: 40 3: 80 6: 160 8: 320

③ Cavity 閥孔型號

T11A T2A T17A T19A

④ Control 控制方式

L: standard screw adjustment 標準螺絲調整


K: handknob with lock knob 調鈕調整

⑤ Adjustment Range (bar) 調壓範圍

A: 35~210 B: 3.5~105 D: 14~55 W: 50~315

⑥ Seal 油封材質

N: buna-N V: viton

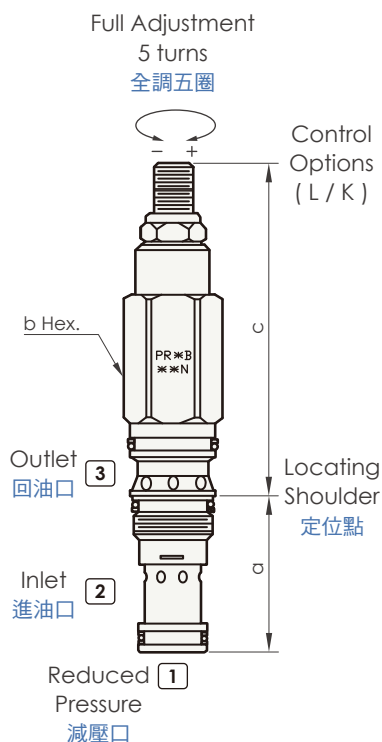

Performance Curves

性能曲線

Regulated Pressure

調壓曲線

