



Solenoid-Operated, 2-posion 2-way, Poppet Valve

電磁閥 2位2口 錐閥

normally closed 常閉



normally open 常開



Technical Data

技術規格


Cavity 閥孔型號	T13A
Capacity 流量	40 l/min
Max. Pressure 最大壓力	350 bar
Leakage 洩漏量	less than 0.7 cc/min
Torque 安裝扭力	45/50 Nm
Max. Current 最大電流	1820mA@12VDC, 910mA@24VDC
Power Consumption 能耗	22 watts
Body's Weight 本體重量	0.24 kg
Coil's Weight 線圈重量	0.23 kg

Option Ordering Information

選購型號

DT 2 A - T13A - M C N - DA 24

- 1 **Model Code** 產品型號
- 2 **Capacity (l/min)** 流量
2: 40
- 3 **Cavity** 閥孔型號
T13A
- 4 **Control** 控制方式
M: manual override 手動調整
- 5 **Type** 型式
C: normally closed 常閉
H: normally open 常開
- 6 **Seal** 油封材質
N: buna-N V: viton
- 7 **Connector (coil)** 連接器
DA: ISO/DIN43650
TA: Deutsch DT04-2P
- 8 **Voltage (coil)** 電壓
12: 12 VDC
24: 24 VDC

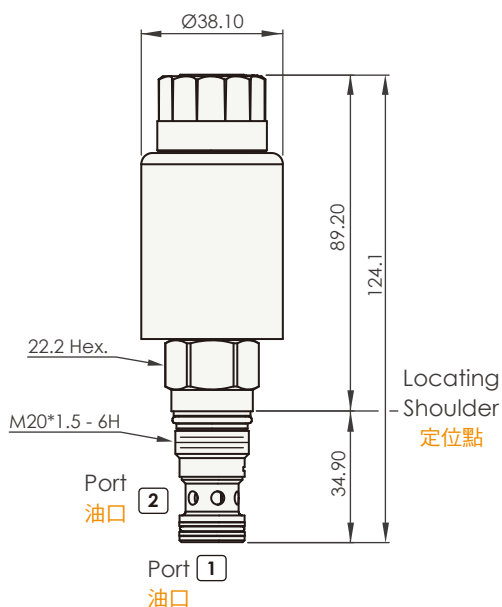


Performance Curves

性能曲線

Typical Pressure Differential vs. Flow

壓差 vs. 流量

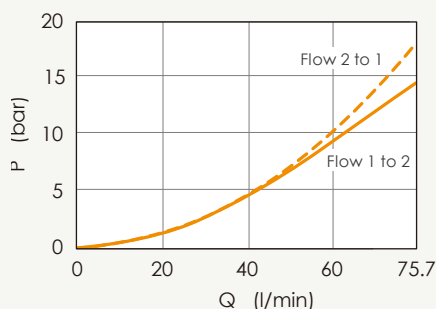

Valve Performance Limits @ 10% Undervoltage & Stabilized Coil Temperature

操作限制 (於 10% 電壓降及穩定線圈溫度)

