


Solenoid-Operated, 2-position 3-way, 1to2, Shift to 2to3, Poppet Valve

電磁閥 2位3口 12通 切換23通 錐閥

Technical Data

技術規格




Cavity 閥孔型號	T11A
Capacity 流量	30 l/min
Max. Pressure 最大壓力	350 bar
Leakage 洩漏量	less than 0.7 cc/min
Torque 安裝扭力	45/50 Nm
Max. Current 最大電流	1820mA@12VDC, 910mA@24VDC
Power Consumption 能耗	22 watts
Body's Weight 本體重量	0.28 kg
Coil's Weight 線圈重量	0.23 kg

Option Ordering Information

選購型號

DW 2 A - T11A - M A N - DA 24

- ① **Model Code** 產品型號
- ② **Capacity (l/min)** 流量
2: 30
- ③ **Cavity** 閥孔型號
T11A
- ④ **Control** 控制方式
M: manual override 手動調整
- ⑤ **Type** 型式
A: 1-2 normally open, 2-3 closed 1-2 常開, 2-3 常閉
- ⑥ **Seal** 油封材質
N: buna-N V: viton
- ⑦ **Connector (coil)** 連接器
DA: ISO/DIN43650
TA: Deutsch DT04-2P
- ⑧ **Voltage (coil)** 電壓
12: 12 VDC
24: 24 VDC

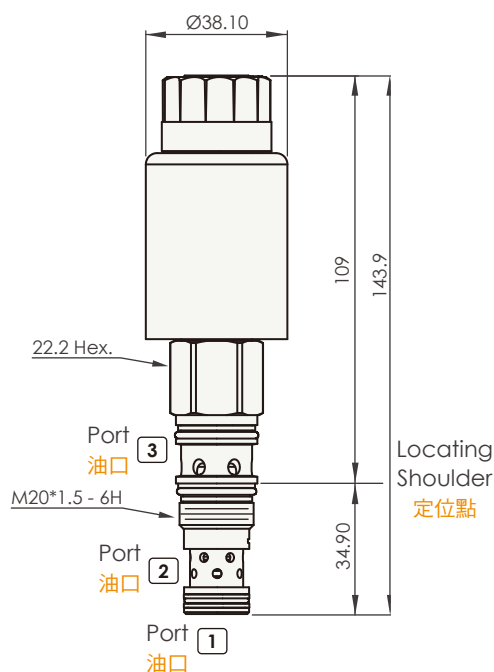


Performance Curves

性能曲線

Pressure Differential vs. Flow

壓差 vs. 流量

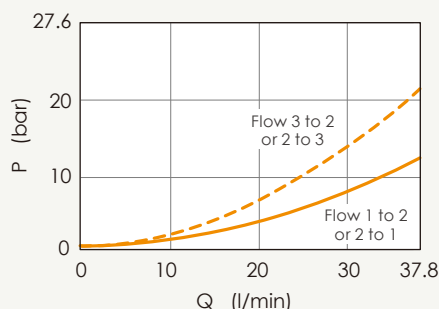

Valve Performance Limits

@ 10% Undervoltage & Stabilized Coil Temperature

操作限制 (於 10% 電壓降及穩定線圈溫度)

