


# Pilot-to-Open Check with POM Set

導壓開 單向閥 帶聚甲醛座




| Model<br>產品型號 | Cavity<br>閥孔型號 | Capacity<br>流量<br>( l/min ) | Dimension 尺寸<br>( mm ) |      |    |     | Torque<br>安裝扭力<br>( Nm ) | Weight<br>重量<br>( kg ) | Max.<br>Pressure<br>最大壓力<br>( bar ) |
|---------------|----------------|-----------------------------|------------------------|------|----|-----|--------------------------|------------------------|-------------------------------------|
|               |                |                             | a                      | b    | c  |     |                          |                        |                                     |
|               |                |                             |                        |      | L  | K   |                          |                        |                                     |
| CK2A          | T11A           | 60                          | 34.9                   | 22.2 | 31 | 64  | 45/50                    | 0.13                   | 350                                 |
| CK3A          | T2A            | 120                         | 34.9                   | 28.6 | 35 | 72  | 60/70                    | 0.24                   | 350                                 |
| CK6A          | T17A           | 240                         | 46                     | 31.8 | 46 | 84  | 200/215                  | 0.53                   | 350                                 |
| CK8A          | T19A           | 480                         | 63.5                   | 41.3 | 59 | 100 | 465/500                  | 1.16                   | 350                                 |

## Option Ordering Information

選購型號

**CK 2 A - T11A - X C N**

- Model Code 產品型號**
- Capacity (l/min) 流量**  
2: 60    3: 120    6: 240    8: 480
- Pilot Version 導壓型式**  
A: bleed through pilot 標準型  
C: sealed pilot 導壓室密封
- Cavity 閥孔型號**  
T11A    T2A    T17A    T19A
- Control 控制方式**  
X: standard pilot 標準導壓  
L: manual load release 手動導壓
- Cracking Pressure (bar) 開閥壓力**  
A: 0.3    C: 2.0    E: 5.0
- Seal 油封材質**  
N: buna-N    V: viton

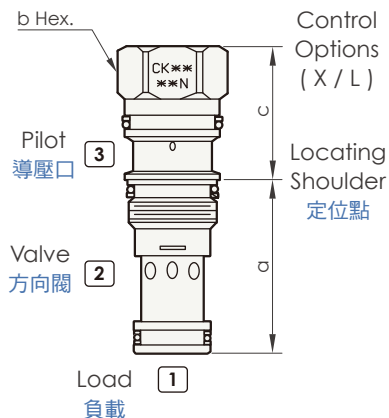

Pilot Ratio 導壓比  
3:1

## Performance Curves

性能曲線

Typical Pressure Drop  
壓降曲線

