



Solenoid-Operated, 2-position 2-way, Spool Valve

電磁閥 2位2口 滑閥

normally closed 常閉



normally open 常開



Technical Data

技術規格


Cavity 閥孔型號	T13A
Capacity 流量	45 l/min
Max. Pressure 最大壓力	350 bar
Leakage 洩漏量	less than 100 cc/min
Torque 安裝扭力	40/50 Nm
Max. Current 最大電流	1820mA@12VDC, 910mA@24VDC
Power Consumption 能耗	22 watts
Body's Weight 本體重量	0.24 kg
Coil's Weight 線圈重量	0.23 kg

Option Ordering Information

選購型號

DL 2 A - T13A - M C N - DA 24

- | | | | | | | | |
|-----------------|---------------------|-------------|-------------------------|--|--------------------|---|--------------------------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| Model Code 產品型號 | Capacity (l/min) 流量 | Cavity 閥孔型號 | Control 控制方式 | Type 型式 | Seal 油封材質 | Connector (coil) 連接器 | Voltage (coil) 電壓 |
| | 2: 45 | T13A | M: manual override 手動調整 | C: normally closed 常閉
H: normally open 常開 | N: buna-N V: viton | DA: ISO/DIN43650
TA: Deutsch DT04-2P | 12: 12 VDC
24: 24 VDC |

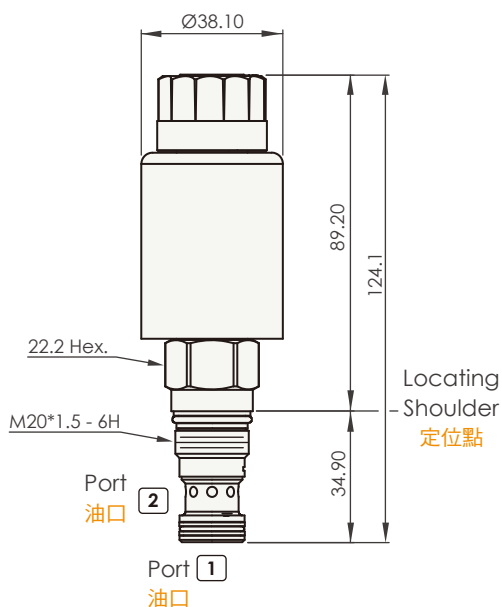


Performance Curves

性能曲線

Typical Pressure Differential vs. Flow

壓差 vs. 流量

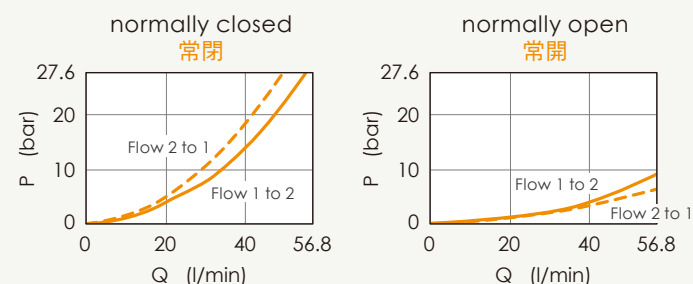

Valve Performance Limits @

10% Undervoltage & Stabilized Coil Temperature

操作限制 (於 10% 電壓降及穩定線圈溫度)

