


Proportional, Direct Acting Pressure Reducing / Relieving, Better Dynamic Response

電比例 直動式減洩壓閥 高動態響應

Technical Data

技術規格




Cavity 閥孔型號	T11A
Capacity 流量	20 l/min
Max. Pressure 最大壓力	350 bar
Leakage 洩漏量	less than 330 cc/min
Torque 安裝扭力	40/50 Nm
Max. Current 最大電流	1820mA@12VDC, 910mA@24VDC
Power Consumption 能耗	22 watts
Body's Weight 本體重量	0.33 kg
Coil's Weight 線圈重量	0.23 kg

Option Ordering Information

選購型號

PR 2 L - T11A - M D N - DA 24

- 1 Model Code 產品型號
- 2 Capacity (l/min) 流量
2: 20
- 3 Cavity 閥孔型號
T11A
- 4 Control 控制方式
M: manual override 手動調整
- 5 Adjustment Range (bar) 調整範圍
D: 3.5~33.5
- 6 Seal 油封材質
N: buna-N V: viton
- 7 Connector (coil) 連接器
DA: ISO/DIN43650
TA: Deutsch DT04-2P
- 8 Voltage (coil) 電壓
12: 12 VDC
24: 24 VDC

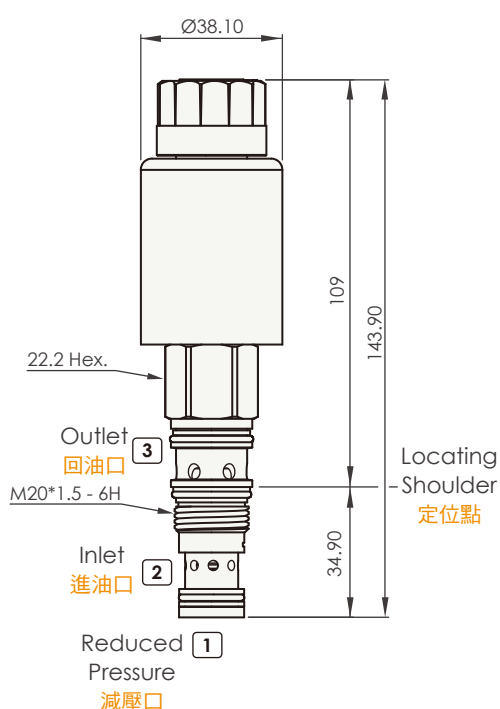

Performance Curves

性能曲線

Pressure vs. Command

壓力 vs. 輸入訊號

