


### Technical Data

### 技術規格



|                      |                           |
|----------------------|---------------------------|
| Cavity 閥孔型號          | T8A                       |
| Capacity 流量          | 1 l/min                   |
| Max. Pressure 最大壓力   | 350 bar                   |
| Leakage 洩漏量          | less than 25 cc/min       |
| Torque 安裝扭力          | 9/10 Nm                   |
| Hysteresis 遲滯        | 5%                        |
| Max. Current 最大電流    | 1820mA@12VDC, 910mA@24VDC |
| Power Consumption 能耗 | 22 watts                  |
| Body's Weight 本體重量   | 0.45 kg                   |
| Coil's Weight 線圈重量   | 0.23 kg                   |

\* The customer must specify the setting pressure, which represents the maximum relief pressure when no command is given. The pressure decreases as the command signal increases.

\* 客戶必須指定設定壓力，該壓力即無輸入訊號時的最大壓力。隨著輸入訊號增加，壓力會降低。


### Option Ordering Information

### 選購型號

**RB 1 N - T8A - X A N - DA 24**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- Model Code 產品型號**
- Capacity (l/min) 流量**  
1: 1 l/min
- Cavity 閥孔型號**  
T8A
- Control 控制方式**  
X: non adjustment 不可調
- Adjustment Range (bar) 調整範圍**  
A: 105~210 B: 55~105 D: 20~55 W: 210~350
- Seal 油封材質**  
N: buna-N V: viton
- Connector (coil) 連接器**  
DA: ISO/DIN43650  
TA: Deutsch DT04-2P
- Voltage (coil) 電壓**  
12: 12 VDC  
24: 24 VDC

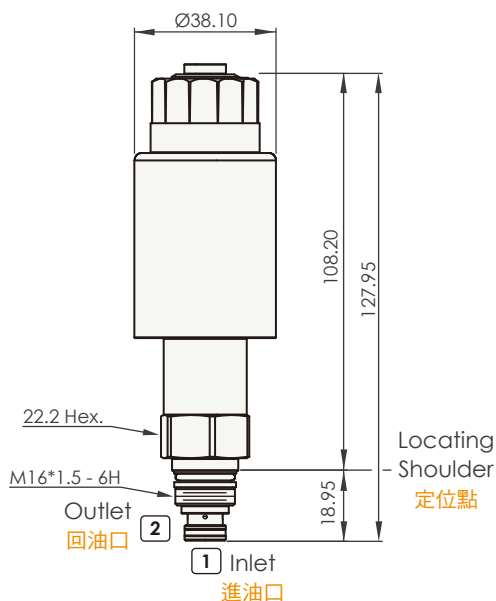


### Performance Curves

### 性能曲線

#### Pressure vs. Command (Range A)

壓力 vs. 輸入訊號 (調整範圍 A)

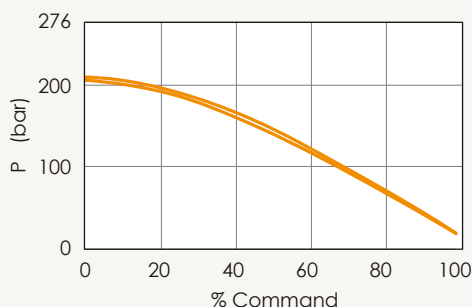

#### Pressure Different vs. Flow (Range A)

壓差 vs. 流量 (調整範圍 A)

