


Fast-acting, Pilot Operated Relief

快速作動 平衡式溢流閥



Model Code 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension 尺寸 (mm)				Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c				
					L	K			
RP2E	T10A	95	39.7	22.2	51	58	45/50	0.15	350
RP3E	T3A	200	47.8	28.6	54	61	60/70	0.25	350
RP6E	T16A	380	61.9	31.8	62	69	200/215	0.55	350
RP8E	T18A	760	79.4	41.3	71	78	465/500	1.17	350

Option Ordering Information

選購型號

RP 2 E - T10A - L A N

① Model Code 產品型號

② Capacity (l/min) 流量

2: 95 3: 200 6: 380 8: 760

③ Cavity 閥孔型號

T10A T3A T16A T18A

④ Control 控制方式

L: standard screw adjustment 標準螺絲調整


K: handknob with lock knob 調鈕調整

⑤ Adjustment Range (bar) 調壓範圍

A: 7~210 B: 3.5~105 C: 10.5~420 N: 5~55

⑥ Seal 油封材質

N: buna-N V: viton

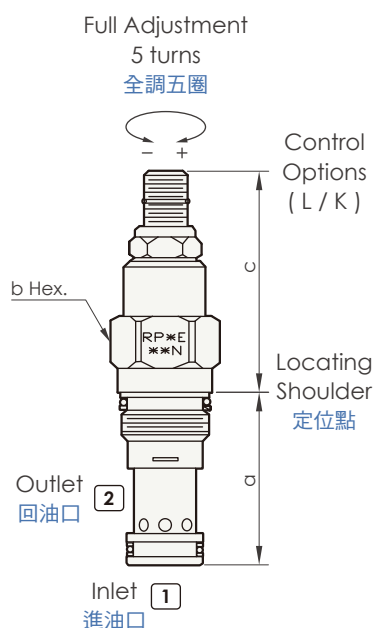

Performance Curves

性能曲線

Typical Pressure Rise

洩壓曲線

