


Vented, Pilot-to-Open Check

透氣型 四口 導壓開單向閥




Model 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension 尺寸 (mm)				Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c				
					x	L			
CV2V	T21A	60	35.1	22.2	53.3	59.4	45/50	0.18	350
CV3V	T22A	120	35.1	28.6	59.4	65.0	60/70	0.30	350
CV6V	T23A	240	46.0	31.8	71.4	77.0	200/215	0.68	350
CV8V	T24A	480	63.5	41.3	88.9	95.8	465/500	1.49	350

Option Ordering Information

選購型號

CV 2 V - T21A - X C N

- Model Code 產品型號**
- Capacity (l/min) 流量**
2: 60 3: 120 6: 240 8: 480
- Cavity 閥孔型號**
T21A T22A T23A T24A
- Control 控制方式**
X: standard pilot 標準導壓
L: manual load release 手動導壓
- Cracking Pressure (bar) 開閥壓力**
A: 0.3 C: 2.0 E: 5.0
- Seal 油封材質**
N: buna-N V: viton

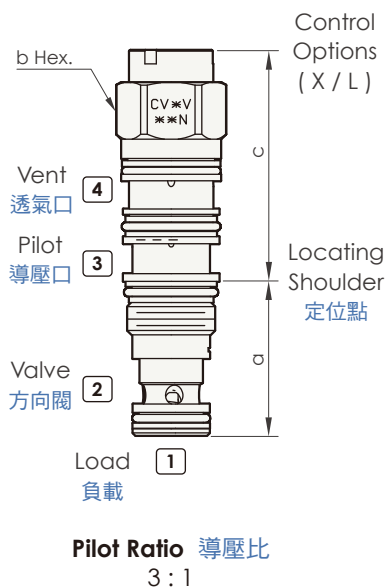

Performance Curves

性能曲線

Unloaded Pressure Drop 卸載壓降曲線

