


Pressure Compensated, Fully Adjustable Needle with Check

全調型 壓力補償 節流閥 附單向閥



Model Code 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension 尺寸 (mm)				Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c				
					L	K			
FD2A	T13A	23	34.9	22.2	58	64	40/50	0.14	350
FD3B	T5A	45	41.1	28.6	67	73	60/70	0.28	350
FD6A	T16A	95	61.9	31.8	73	79	200/215	0.55	350
FD8A	T18A	200	79.4	41.3	84	90	465/500	1.23	350

Option Ordering Information

選購型號

FD 2A - T13A - L A N

① Model Code 產品型號

② Capacity (l/min) 流量

2A: 23 3B: 45 6A: 95 8A: 200

③ Cavity & Adjustment Range 閥孔型號與流量調整範圍

T13A	T5A	T16A	T18A
0.4~23 l/min	0.4~45 l/min	1.0~95 l/min	1.0~200 l/min


④ Control 控制方式

L: standard screw adjustment 標準螺絲調整

K: handknob with lock knob 調鈕調整

⑤ Seal 油封材質

N: buna-N V: viton

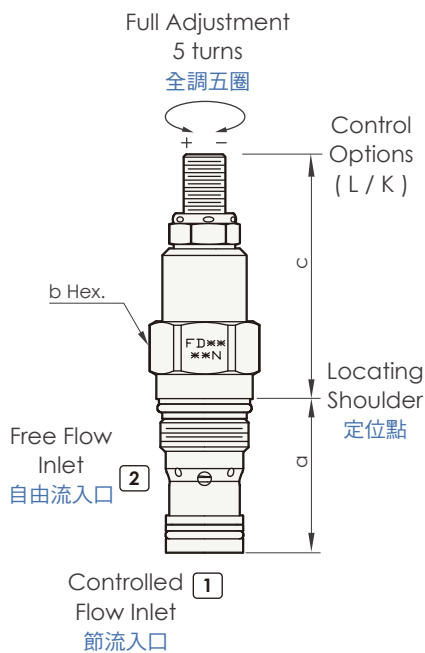

Performance Curves

性能曲線

Typical Performance

流量特性

