


Normally Closed, Logic Relief

常閉型 邏輯溢流閥

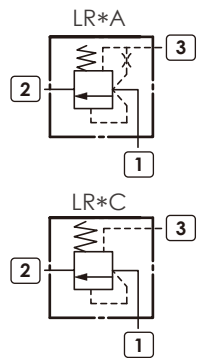


Model Code 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension 尺寸 (mm)				Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c				
					x	L			
LR2*	T11A	60	34.9	22.2	31	64	40/50	0.12	350
LR3*	T2A	120	34.9	28.6	35	72	60/70	0.22	350
LR6*	T17A	240	46.0	31.8	46	84	200/215	0.50	350
LR8*	T19A	480	63.5	41.3	59	100	465/500	1.15	350

Option Ordering Information

選購型號

LR 2 A - T11A - X D N

- Model Code 產品型號**
- Capacity (l/min) 流量**
2: 60 3: 120 6: 240 8: 480
- Type 型式**
A: internal pilot 內部導壓
C: external pilot 外部導壓
- Cavity 閥孔型號**
T11A T2A T17A T19A
- Control 控制方式**
X: non adjustable 不可調
L: standard screw adjustment 標準螺絲調整
- Cracking Pressure (bar) 開 / 關閥壓力**
D: 3.5 F: 7.0 G: 10.0
- Seal 油封材質**
N: buna-N V: viton

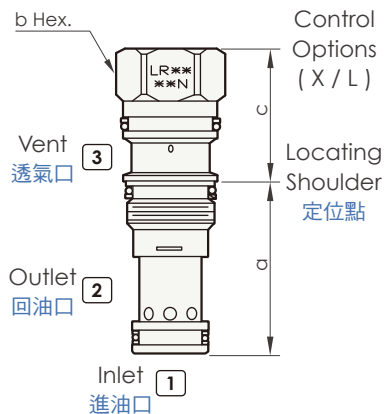

Performance Curves

性能曲線

Typical Pressure Drop

壓降曲線

